


**Product Specifications:**

**Nominal Thickness:** Vinyl panel .046"  
**Windload:** Laboratory tested to withstand windloads up to Category 5 Hurricane rating  
**Texture:** Cedargrain



House shown in Canyon Clay.

**Classic Colours**

Snow White	Canyon Clay	Dover Gray
Almond	Pebble	Storm <b>NEW!</b>
Wicker	Sage	Chesapeake Gray <b>NEW!</b>

**Designer Colours**

Dark Drift	Rockwell Blue <b>NEW!</b>	Hudson Slate <b>NEW!</b>
Meadow Fern <b>NEW!</b>	Midnight Surf	Windswept Smoke
Moonlit Moss		

**THE NEW STANDARD IN QUALITY AND ENERGY SAVINGS**

**Energy-Smart Design** Custom-contoured expanded polystyrene rigid foam insulation (up to 1-1/4" thick†) helps block energy loss year-round.

**Greater Impact Resistance** Up to 400% more impact resistance than conventional "hollow back" siding.

**Superior Perm Rating of 5** Allows insulation to breathe and moisture to escape, not get trapped inside.

**Full-Roll Nail Hem** Heavy-duty, double-thick wall attachment increases strength and structural integrity.

**Built Hurricane-Tough!** Laboratory tested to withstand winds up to Category 5 Hurricane rating.


**Beautiful Wood-Like Appearance** Natural cedargrain texture and low-gloss finish for subtle elegance.

**Longer Panels** The extra-long 16'8" and 16'4" panel lengths create fewer overlaps for a superior finished look.

†Nominal.  
 Not all profiles are available in all colours.

## INTELLIGENT SIDING SOLUTIONS


A fusion of beauty and strength, Sequoia Select EnFusion helps prevent energy loss to keep your home warm and cozy in the winter and refreshingly cool in the summer – with less energy spending. The laminated, rigid foam insulation is contoured to fill the gap between the siding and your home to provide superior energy efficiency. This protective layer also conceals imperfections in the underlayment to ensure smooth wall lines and an upscale appearance.



### Double 5" Dutch

Insulated Panel with 1-1/4"  
Overall Panel Thickness (31.75)  
3/4" Butt (19)  
2-5" Exposure per Panel  
(127/254)  
16'4" Lengths (4979)

**Packaging:**  
7 pcs. per ctn.  
.95 sq. per ctn. (8.84 m<sup>2</sup>)  
Ship. wt: 56.8 lb (25.8 kg)



### Double 6"

Insulated Panel with 1-1/4"  
Overall Panel Thickness (31.75)  
3/4" Butt (19)  
2-6" Exposure per Panel  
(152.4/304.8)  
16'8" Lengths (5080)

**Packaging:**  
6 pcs. per ctn.  
1 sq. per ctn. (9.3 m<sup>2</sup>)  
Ship. wt: 55.7 lb (25.3 kg)



**Warranty Coverage:**  
Lifetime Limited Warranty  
Lifetime Limited Fade Coverage  
Lifetime Limited Hail Coverage

Please see detailed product directory for accessory information.  
For metric, unless indicated otherwise, all measurements are in millimeters (mm).



# SEQUOIA SELECT

Ultra-Premium Vinyl Siding

**Product Specifications:**

**Nominal Thickness:** .046"  
**Windload:** Laboratory tested to withstand windloads up to 407 km/h (253 mph)\*  
**Texture:** Cedargrain



**Classic Colours**

Snow White	Wicker	Dover Gray
Sandstone	Canyon Clay	Storm
Linen	Pebble	Chesapeake Gray <b>NEW!</b>
Almond	Monterey Sand	Sage
Maize	Pearl	Juniper Grove

**Designer Colours**

Majestic Brick <b>NEW!</b>	Meadow Fern <b>NEW!</b>	Marine Dusk <b>NEW!</b>
Dark Drift	Moonlit Moss	Hudson Slate <b>NEW!</b>
Rockport Brown <b>NEW!</b>	Rockwell Blue	Windswept Smoke
Espresso	Coastal Blue	Iron Ore
Smoked Timber <b>NEW!</b>	Midnight Surf	

**THE ULTRA-PREMIUM DISTINCTION**

**Extra-Heavy Wall Thickness** Heavy-duty .046" thickness provides superior rigidity, ensuring straight, smooth walls.

**Full-Roll Nailing Hem** Delivers double-strength wall attachment.



**Exclusive Advantage Lock™ System**

Securely connects panels, greatly enhancing rigidity and stability.

**Hurricane-Velocity Wind Resistance** Built hurricane-tough! In laboratory tests simulating hurricane-force wind conditions, Sequoia Select withstood windloads up to 407 km/h (253 mph).\*

**Rich Cedargrain Emboss** Beautiful low-gloss finish achieves natural appeal and excellent durability; requires minimal upkeep.

**Superior Lap Height** Full 3/4" lap height creates a deeper dimension and enhanced shadow lines for a true wood look.



\*Windload performance may vary by profile design.

Double 5" profile not available in Designer Colours; Double 5" Dutch not offered in Designer Colours in British Columbia and Alberta.


# A PREMIER HOME EXTERIOR

Exquisite style, exceptional strength – that’s the hallmark of Sequoia Select ultra-premium vinyl siding. Greater panel thickness and deeper dimension. An extraordinary hurricane-velocity wind resistance up to 407 km/h (253 mph).\* A luxurious low-gloss finish embossed with a rich cedargrain texture. All in a generous selection of 29 beautiful colours and 4 classic profiles for tastefully stated elegance.


House shown in Iron Ore.

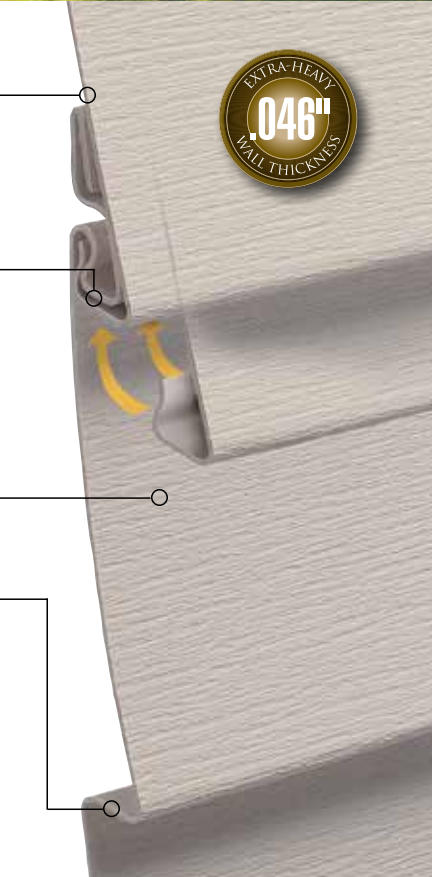


**Double 4"**  
 3/4" Butt (19)  
 2-4" Exposure per Panel (101.6/203.2)  
 12'6" Lengths (3810)  
**Packaging:**  
 24 pcs. per ctn.  
 2 sqs. per ctn. (18.6 m<sup>2</sup>)  
 Ship. wt: 112 lb (50.8 kg)



**Double 4-1/2" Dutch**  
 3/4" Butt (19)  
 2-4-1/2" Exposure per Panel (114.5/229)  
 12'1" Lengths (3683)  
**Packaging:**  
 22 pcs. per ctn.  
 2 sqs. per ctn. (18.6 m<sup>2</sup>)  
 Ship. wt: 102.5 lb (46.5 kg)



**Double 5"**  
 3/4" Butt (19)  
 2-5" Exposure per Panel (127/254)  
 12' Lengths (3658)  
**Packaging:**  
 20 pcs. per ctn.  
 2 sqs. per ctn. (18.6 m<sup>2</sup>)  
 Ship. wt: 100 lb (45 kg)



**Double 5" Dutch**  
 3/4" Butt (19)  
 2-5" Exposure per Panel (127/254)  
 12' Lengths (3658)  
**Packaging:**  
 20 pcs. per ctn.  
 2 sqs. per ctn. (18.6 m<sup>2</sup>)  
 Ship. wt: 102.5 lb (46.5 kg)



**Warranty Coverage:**  
 Lifetime Limited Warranty  
 Lifetime Limited Fade Coverage  
 Lifetime Limited Hail Coverage

Please see detailed product directory for accessory information. For metric, unless indicated otherwise, all measurements are in millimeters (mm).