


Product Specifications:

Nominal Thickness: Vinyl panel .046"
Windload: Laboratory tested to withstand windloads up to Category 5 Hurricane rating
Texture: Cedargrain



House shown in Canyon Clay.

Classic Colours

Snow White	Canyon Clay	Dover Gray
Almond	Pebble	Storm NEW!
Wicker	Sage	Chesapeake Gray NEW!

Designer Colours

Dark Drift	Rockwell Blue NEW!	Hudson Slate NEW!
Meadow Fern NEW!	Midnight Surf	Windswept Smoke
Moonlit Moss		

THE NEW STANDARD IN QUALITY AND ENERGY SAVINGS

Energy-Smart Design Custom-contoured expanded polystyrene rigid foam insulation (up to 1-1/4" thick†) helps block energy loss year-round.

Greater Impact Resistance Up to 400% more impact resistance than conventional "hollow back" siding.

Superior Perm Rating of 5 Allows insulation to breathe and moisture to escape, not get trapped inside.

Full-Roll Nail Hem Heavy-duty, double-thick wall attachment increases strength and structural integrity.

Built Hurricane-Tough! Laboratory tested to withstand winds up to Category 5 Hurricane rating.


Beautiful Wood-Like Appearance Natural cedargrain texture and low-gloss finish for subtle elegance.

Longer Panels The extra-long 16'8" and 16'4" panel lengths create fewer overlaps for a superior finished look.

†Nominal.
 Not all profiles are available in all colours.

INTELLIGENT SIDING SOLUTIONS


A fusion of beauty and strength, Sequoia Select EnFusion helps prevent energy loss to keep your home warm and cozy in the winter and refreshingly cool in the summer – with less energy spending. The laminated, rigid foam insulation is contoured to fill the gap between the siding and your home to provide superior energy efficiency. This protective layer also conceals imperfections in the underlayment to ensure smooth wall lines and an upscale appearance.



Double 5" Dutch

Insulated Panel with 1-1/4"
Overall Panel Thickness (31.75)
3/4" Butt (19)
2-5" Exposure per Panel
(127/254)
16'4" Lengths (4979)


Packaging:
7 pcs. per ctn.
.95 sq. per ctn. (8.84 m²)
Ship. wt: 56.8 lb (25.8 kg)



Double 6"

Insulated Panel with 1-1/4"
Overall Panel Thickness (31.75)
3/4" Butt (19)
2-6" Exposure per Panel
(152.4/304.8)
16'8" Lengths (5080)

Packaging:
6 pcs. per ctn.
1 sq. per ctn. (9.3 m²)
Ship. wt: 55.7 lb (25.3 kg)

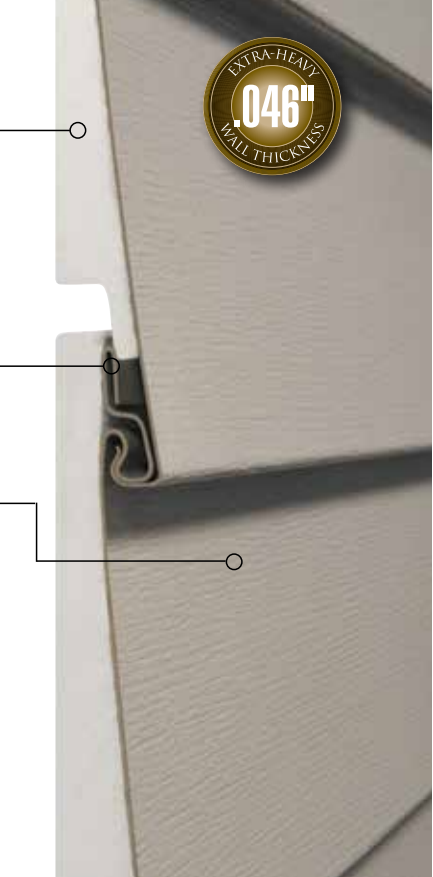

Warranty Coverage:
Lifetime Limited Warranty
Lifetime Limited Fade Coverage
Lifetime Limited Hail Coverage

Please see detailed product directory for accessory information.
For metric, unless indicated otherwise, all measurements are in millimeters (mm).



SEQUOIA SELECT

Ultra-Premium Vinyl Siding

Product Specifications:

Nominal Thickness: .046"
Windload: Laboratory tested to withstand windloads up to 407 km/h (253 mph)*
Texture: Cedargrain



Classic Colours

Snow White	Wicker	Dover Gray
Sandstone	Canyon Clay	Storm
Linen	Pebble	Chesapeake Gray NEW!
Almond	Monterey Sand	Sage
Maize	Pearl	Juniper Grove

Designer Colours

Majestic Brick NEW!	Meadow Fern NEW!	Marine Dusk NEW!
Dark Drift	Moonlit Moss	Hudson Slate NEW!
Rockport Brown NEW!	Rockwell Blue	Windswept Smoke
Espresso	Coastal Blue	Iron Ore
Smoked Timber NEW!	Midnight Surf	

THE ULTRA-PREMIUM DISTINCTION

Extra-Heavy Wall Thickness Heavy-duty .046" thickness provides superior rigidity, ensuring straight, smooth walls.

Full-Roll Nailing Hem Delivers double-strength wall attachment.



Exclusive Advantage Lock™ System

Securely connects panels, greatly enhancing rigidity and stability.

Hurricane-Velocity Wind Resistance Built hurricane-tough! In laboratory tests simulating hurricane-force wind conditions, Sequoia Select withstood windloads up to 407 km/h (253 mph).*

Rich Cedargrain Emboss Beautiful low-gloss finish achieves natural appeal and excellent durability; requires minimal upkeep.

Superior Lap Height Full 3/4" lap height creates a deeper dimension and enhanced shadow lines for a true wood look.



*Windload performance may vary by profile design.

Double 5" profile not available in Designer Colours; Double 5" Dutch not offered in Designer Colours in British Columbia and Alberta.

A PREMIER HOME EXTERIOR

Exquisite style, exceptional strength – that’s the hallmark of Sequoia Select ultra-premium vinyl siding. Greater panel thickness and deeper dimension. An extraordinary hurricane-velocity wind resistance up to 407 km/h (253 mph).* A luxurious low-gloss finish embossed with a rich cedargrain texture. All in a generous selection of 29 beautiful colours and 4 classic profiles for tastefully stated elegance.

House shown in Iron Ore.

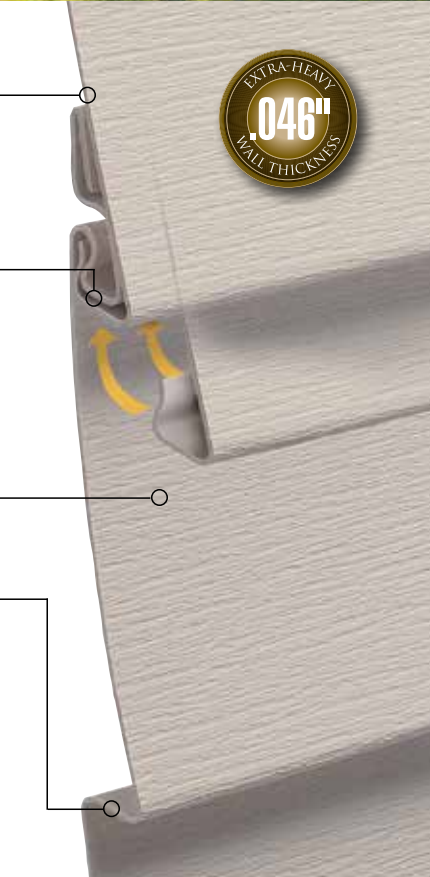


Double 4"

3/4" Butt (19)
2-4" Exposure per Panel (101.6/203.2)
12'6" Lengths (3810)

Packaging:

24 pcs. per ctn.
2 sqs. per ctn. (18.6 m²)
Ship. wt: 112 lb (50.8 kg)




Double 4-1/2" Dutch

3/4" Butt (19)
2-4-1/2" Exposure per Panel (114.5/229)
12'1" Lengths (3683)

Packaging:

22 pcs. per ctn.
2 sqs. per ctn. (18.6 m²)
Ship. wt: 102.5 lb (46.5 kg)




Double 5"

3/4" Butt (19)
2-5" Exposure per Panel (127/254)
12' Lengths (3658)

Packaging:

20 pcs. per ctn.
2 sqs. per ctn. (18.6 m²)
Ship. wt: 100 lb (45 kg)



Double 5" Dutch

3/4" Butt (19)
2-5" Exposure per Panel (127/254)
12' Lengths (3658)

Packaging:

20 pcs. per ctn.
2 sqs. per ctn. (18.6 m²)
Ship. wt: 102.5 lb (46.5 kg)



Warranty Coverage:

Lifetime Limited Warranty
Lifetime Limited Fade Coverage
Lifetime Limited Hail Coverage

Please see detailed product directory for accessory information. For metric, unless indicated otherwise, all measurements are in millimeters (mm).



BOARD & BATTEN

Ultra-Premium Vertical Vinyl Siding

HISTORICAL CHARACTER

Board & Batten's unique vertical design marries historical appeal with modern practicality. Featuring an authentically proportioned 7" exposure with a 5-1/2" board and 1-1/2" batten strip, this ultra-premium panel works well as a whole-house exterior or as an accent siding.

House shown in Dover Gray.



Product Specifications:


Nominal Thickness: .048"
Windload: Laboratory tested to withstand windloads up to 180 km/h (112 mph)
Texture: Light Roughsawn

7" Vertical Board & Batten

1/2" Batten Height (12.7)
 1-1/2" Batten Width (38.1)
 7" Exposure per Panel (178.5)
 10' Lengths (3048)

Packaging:

17 pcs. per ctn.
 1 sq. per ctn. (9.2 m²)
 Ship. wt: 50 lb (23 kg)



Classic Colours

Snow White	Wicker	Dover Gray
Sandstone	Canyon Clay	Storm
Linen	Pebble	Chesapeake Gray NEW!
Almond	Monterey Sand	Sage
Maize	Pearl	Juniper Grove

Designer Colours (not available in British Columbia and Alberta)

Majestic Brick NEW!	Meadow Fern NEW!	Marine Dusk NEW!
Dark Drift	Moonlit Moss	Hudson Slate NEW!
Rockport Brown NEW!	Rockwell Blue	Windswept Smoke
Espresso	Coastal Blue	Iron Ore
Smoked Timber NEW!	Midnight Surf	

Variegated Colours

Aspen	Willow
Earthen	Rainforest



Warranty Coverage:

Lifetime Limited Warranty
 Lifetime Limited Fade Coverage
 Lifetime Limited Hail Coverage




CONCORD®

Quality Vinyl Siding

TIMELESS QUALITY AND STYLE

Featuring five versatile profiles embossed with a light roughsawn texture, Concord is a longtime favourite among homeowners who desire the beauty of a freshly painted wood finish but without the time-consuming maintenance. The well-built panel is fortified with a rolled nail hem for extra-strong wall attachment and durability.




Double 4"

1/2" Butt (12.7)
2-4" Exposure per Panel (101.6/203.2)
12'6" Lengths (3810)

Packaging:

24 pcs. per ctn.
2 sqs. per ctn. (18.6 m²)
Ship. wt: 94 lb (43 kg)




Double 4" Dutch

1/2" Butt (12.7)
2-4" Exposure per Panel (101.6/203.2)
12'6" Lengths (3810)

Packaging:

24 pcs. per ctn.
2 sqs. per ctn. (18.6 m²)
Ship. wt: 94 lb (43 kg)




Double 5"

1/2" Butt (12.7)
2-5" Exposure per Panel (127/254)
12' Lengths (3658)

Packaging:

20 pcs. per ctn.
2 sqs. per ctn. (18.6 m²)
Ship. wt: 91 lb (41 kg)




Double 5" Dutch

1/2" Butt (12.7)
2-5" Exposure per Panel (127/254)
12' Lengths (3658)

Packaging:

20 pcs. per ctn.
2 sqs. per ctn. (18.6 m²)
Ship. wt: 90 lb (41 kg)



10" Vertical

10" Exposure per Panel (254)
10' Lengths (3048)

Packaging:

24 pcs. per ctn.
2 sqs. per ctn. (18.6 m²)
Ship. wt: 83 lb (38 kg)



House shown in Pearl.



Product Specifications:

Nominal Thickness: .042"
Windload: Laboratory tested to withstand windloads up to 310 km/h (193 mph)*
Texture: Light Roughsawn

Classic Colours

Snow White	Wicker	Dover Gray
Sandstone	Canyon Clay	Storm
Linen	Pebble	Chesapeake Gray NEW!
Almond	Monterey Sand	Sage
Maize	Pearl	Juniper Grove



Warranty Coverage:
Lifetime Limited Warranty
Lifetime Limited Fade Coverage
Lifetime Limited Hail Coverage

*Windload performance may vary by profile design. Please see detailed product directory for accessory information. For metric, unless indicated otherwise, all measurements are in millimeters (mm).